






RS232 ↔ IBIS-Slave


Interface Converter



-  Allows the operation of a serial interface as IBIS I/O device
-  Galvanically isolated
-  No supply voltage required

Technical data

Interfaces:	RS232 IBIS carriage bus (Slave)
Housing:	Plastic
Dimensions:	W21 x H17 x D62 mm

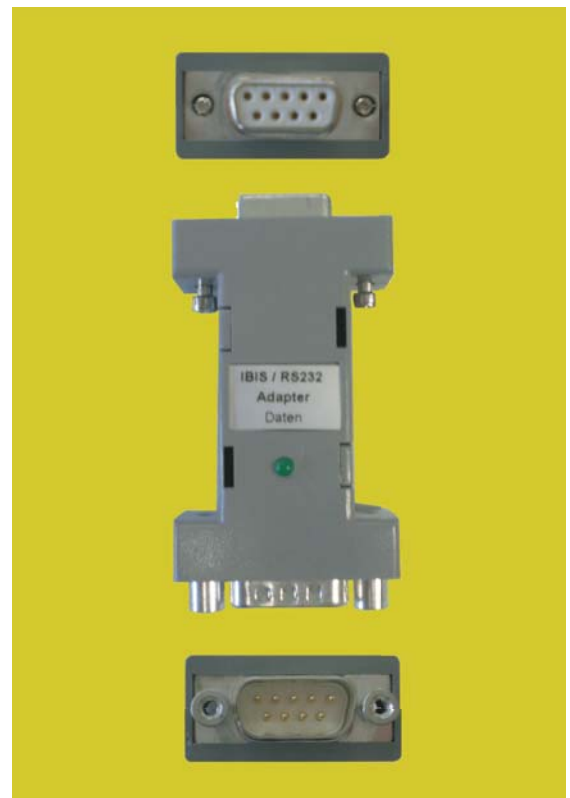

WE
MOVE YOU
AHEAD

Technical information and dimensions can be subject to change, due to new developments and new technology. All rights reserved.

WB_interface_converter_RS232_IBIS_slave_EN • 11/2010