






# InfoVision Slave 18,5

## Infodisplay



-  Cinema feeling for passengers
-  Latest TFT technology with LED backlight
-  Daisy Chain DVI



### The device

The InfoVision Slave 18,5 is designed to meet the harsh requirements of public transport in-vehicle installations by combining state of the art TFT panel technology within a rugged housing.

Driven by a DVI signal source like the InfoVision PC the large panel area provides the space to create impressive infotainment solutions.

### The features

Due to the low vertical profile the InfoVision Slave 18,5 finds its mounting place in a variety of different vehicle types without interfering with the passengers passing height.

A rugged housing constructed of stainless steel as well as a hardened safety glass front guarantee a very high grade of protection against vandalism.

Latest wide angle TFT technology combined with bright, energy efficient and long life LED backlighting ensures superior readability even under critical illumination conditions.



An integrated brightness control takes care of the panel backlight intensity and matches it automatically to any environmental lighting situation.

Industrial, slim and easy to install RJ45 Cat5e ethernet cabling is used to connect the DVI signal source to the monitor.


An integrated repeater shapes the incoming signal and acts as signal source itself. This makes it possible to daisy-chain multiple InfoVision Slave devices.



# InfoVision Slave 18,5



## Dimensions

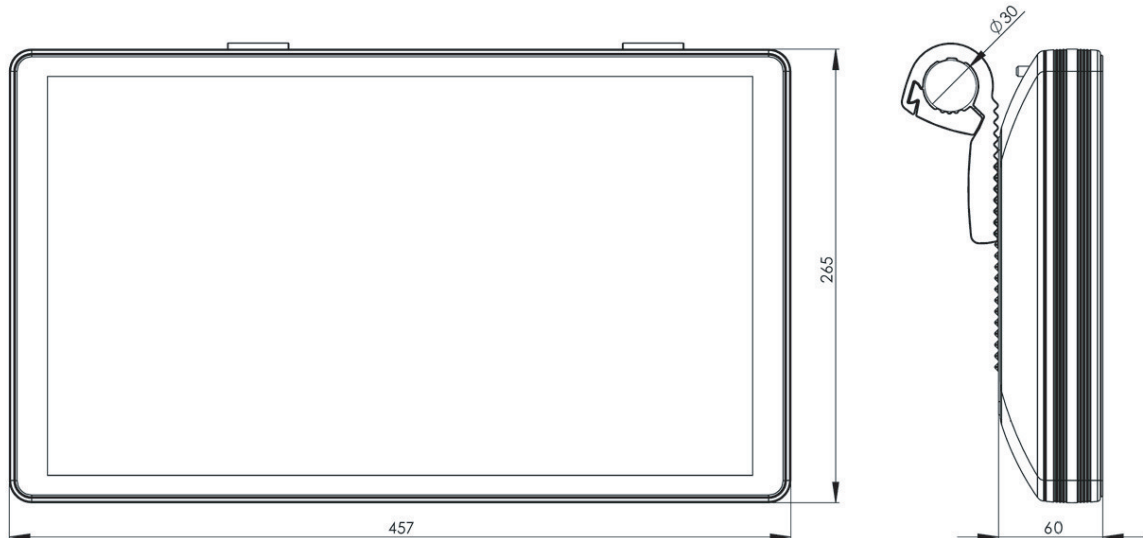

## Technical Data

<b>Panel size:</b>	18.5" TFT-LCD
<b>Resolution:</b>	1368 x 768
<b>Luminance:</b>	typ. 250 cd/m <sup>2</sup>
<b>Signal system:</b>	DVI compliant with RJ45 connectors
<b>Power consumption:</b>	~ 30 W
<b>Power input:</b>	24 V DC (18 V .. 36 V)
<b>Environmental conditions:</b>	Operating temperature: 0 °C .. +50 °C Humidity: up to 95 %
<b>Housing:</b>	Aluminium frame, hardened safety glass, anti-glare
<b>Dimensions:</b>	W457 x H265 x D60 mm
<b>Weight:</b>	7 kg
<b>Option:</b>	Systemmonitoring via RS485

WE  
MOVE YOU  
AHEAD



Technical Information and dimensions are subject to change, due to new developments and technology. All rights reserved.  
WB\_INFOVISION\_18,5"\_EN • 5/2017